


TAQ EXTRA - (DN 19- DN50)

STAINLESS STEEL BRAIDED CONNECTORS



Heater and air conditioning




Applications

CHARACTERISTICS AND TECHNICAL SPECIFICATIONS

Dn	Outer diameter	Inner diameter	Fitting inner diameter	Flow rate	Minimum bending radius	Working pressure	Working temperature
19	27 mm	19 mm	15 mm	120 lit/mit at 3 bar	70 mm	10 bar	90°C
25	33 mm	25 mm	20 mm	200 lit/mit at 3 bar	100 mm	10 bar	90°C
30	42 mm	30 mm	25 mm	400 lit/mit at 3 bar	190 mm	10 bar	90°C
40	52 mm	40 mm	32 mm	700 lit/mit at 3 bar	230 mm	8 bar	90°C
50	62 mm	50 mm	40 mm	1050 lit/mit at 3 bar	300 mm	7 bar	90°C

H2o potable: yes

MATERIALS

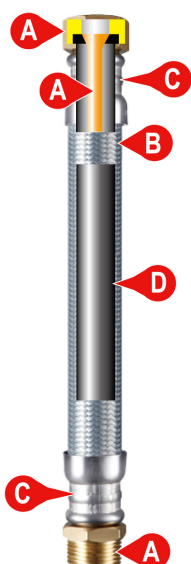

- A. Nickle-plated brass
- B. Stainless steel wires AISI 304
- C. Stainless steel AISI304
- D. EPDM

FITTINGS

Dn	Nut G	Male G	Elbow
19	3/4"	3/4"	3/4"
25	1"	1"	1"
30	1/4"	1" 1/4"	—
40	1 1/2"	1 1/2"	—
50	2"	2"	—



TAQ EXTRA Rev. 01